
pipetman®

Refill for TOWERPACK boxes





- Uses 60% less space and 70% less plastic
- One reload box for the entire TOWERPACK range
- Easy-to-use, one-handed system
- Protective base to prevent contamination from environmental pollution and dust
- Available in standard and sterilized versions

Loading instructions on the reverse side.




Download certificates at www.gilson.com



Loading a TOWERPACK Box

- Remove the TOWERPACK dispenser from the protective support.
- 2. Place the TOWERPACK on the opened reload box.
- 3. Press down firmly until the rack snaps into place.
- 4. When a rack is empty, remove it from the reload box, and load a new rack.

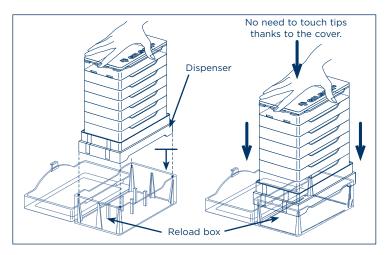

Autoclaving

The entire TOWERPACK can be autoclaved or just the reload box filled with one rack of tips.

Autoclaving conditions: moist heat, 121°C, 0.1 MPa for 20 minutes.

NOTE

When autoclaving PIPETMAN[®] DIAMOND Tips D10, keep the box upright to prevent these tips from falling out of the rack.

Loading a Multichannel PIPETMAN®

The ROCKY RACK technique makes it extremely easy to fit PIPETMAN DIAMOND Tips on a multichannel PIPETMAN.

Exert a light vertical force to obtain a perfect seal on all eight or twelve channels.



ROCKY RACK technique

